

AAP

Aluminium Access Products Ltd




Tallescope Models 9812/9815 Light Alloy Telescopic Workplatform

- Ideal for small theatre studios
- Retracts for passing under roof trusses, pipe runs, etc
- Folds flat to pass through doors and into lifts - easy to transport
- Constructed in light alloy sections throughout
- Includes locking castors and adjustable legs
- See page 4 for specifications and models

**The one man 'spot'
access tool for reach
heights up to 6m (20ft)**

Unit 8 Acorn Business Centre, Acorn Court
Butts Street, Leigh WN7 3DD
Tel: 01942 514318
Email: info@tallescope.co.uk

Assembly Instructions

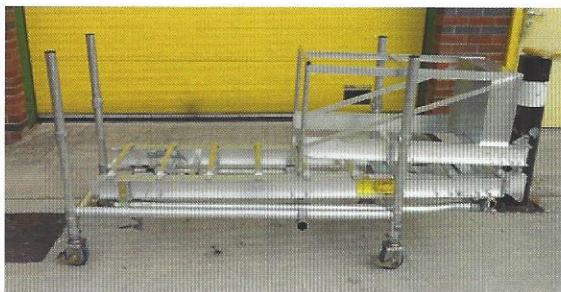

1 Tallscope shown stowed on castors.



5 Position outriggers and firmly lock outrigger.



2 From stowed position raise centre section.



6 Raise cage section keeping arm rigid as ladder is mounted.




7 Insert dual drop end pins to lock pivoted top section in vertical position. Extend to height if required.




3 Lock dual hooks.



Tallescope Specification

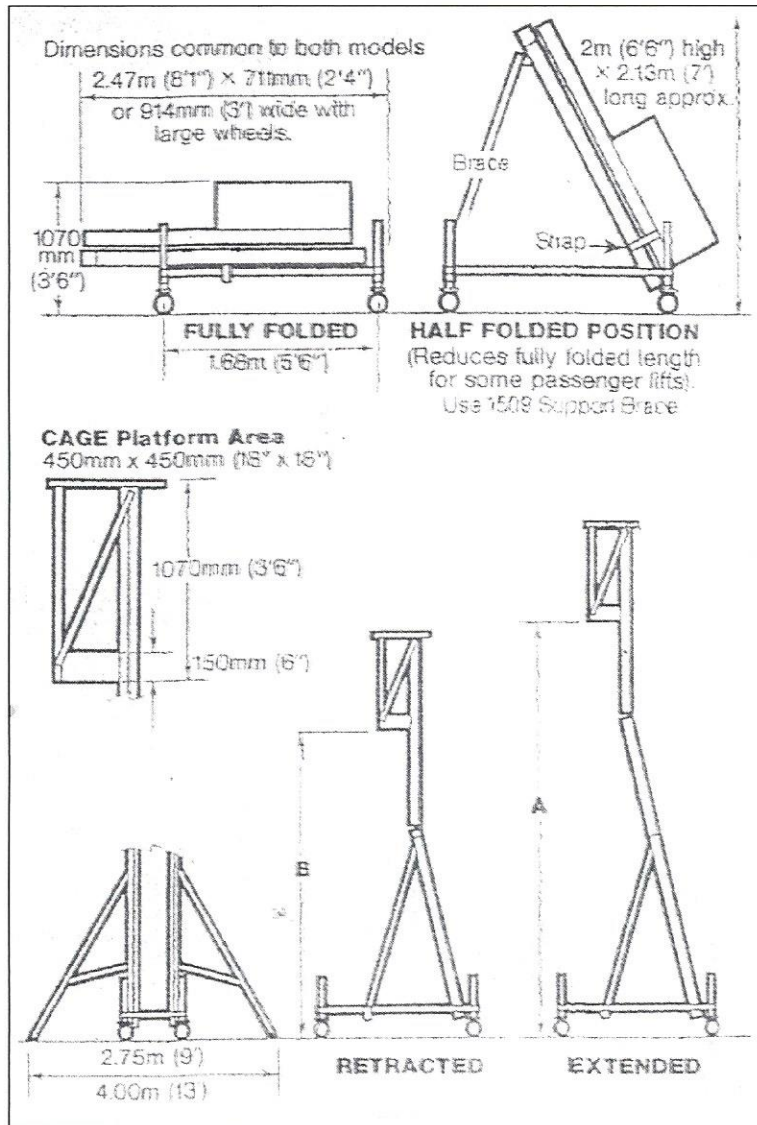

Model No's	A	B	Weight with castors	Weight with large wheels
9812	3.66m(12')	3.42m(8')	81kg (178lbs)	113kg (250lbs)
9815	4.66m (15'3")	3.42m (11'3")	86kg (190lbs)	119kg (263lbs)

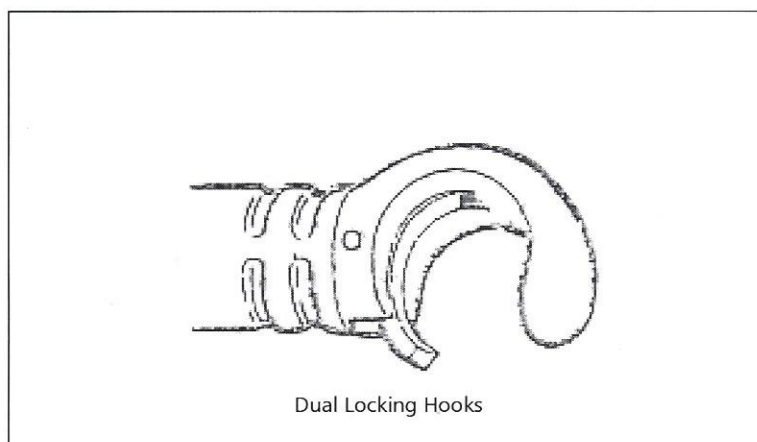

Tallescope is constructed in Aluminium Alloy. Ease of handling and use enables action on vital maintenance task priorities - which might otherwise be deferred. Adherence to strict maintenance schedules promotes safety.

Tallescope is designed for 113kg (250lbs) platform load with four to one safety factor.

Tallescope base sizes provide platform height to base ratio of three to one.

Tallescope has automatic stops that ensure safe overlap of telescopic mast when fully extended.

Tallescope non-slip rungs are well spaced to prevent finger trapping. Rungs are at 250mm (10") spacing.

Tallescope incorporates dual locking hooks in extending section to ensure positive safe hold when erected.

Tallescope chassis locking hooks have segmental latches with 225 degrees arc of contact with mating tube. All hooks are field servicable.

Tallescope incorporates bulls-eye spirit level.

Tallescope has four adjustable legs for levelling with ample safe overlap when fully extended.

Tallescope 125mm (5") diameter castors are dual locking by downward pedal action.

Tallescope chassis frame at opposite end to ladder base has captive pivoting cross member to permit close access of chassis around light columns.